

# RT-HR-2M-110

2x Telecentric lens for detectors up to 2/3", WD 110 mm

## 仕様

拡大倍率		2.00
画像円径	(mm)	11
Max detector size		2/3"

## 対象物視野

1/3"センサー(4.8x3.6mm)	(mm x mm)	2.4 x 1.8
1/2.5"センサー(5.70x4.28mm)	(mm x mm)	2.9 x 2.1
1/2"センサー(6.4x4.8mm)	(mm x mm)	3.2 x 2.4
1/1.8"センサー(7.13x5.37mm)	(mm x mm)	3.6 x 2.7
2/3" - 5MPセンサー(8.45x7.07mm)	(mm x mm)	4.2 x 3.5

## 光学仕様

作動距離	(mm)	110.00
wF/# 1		23.8
Distortion	(%)	0.78
Field depth	(mm)	0.40
Nominal resolving power	( $\mu$ m)	8.00

## 機械的仕様

マウント		C
長さ	(mm)	87.4
直径	(mm)	18.0
重量	(g)	55
Focus lock screws		-
Iris lock screws		-

## ノート

1. 実効Fナンバー：マクロで使用される際のレンズの実際のFナンバー。

## 互換性のある製品

LTLAIC series  
Continuous LED low angle diffused ringlights

RT-DLR2-60-050-2-W-24V-FL	Continuous LED low angle diffused ringlight, inner diameter 18 mm, 60°, white
RT-DLR2-60-050-2-R-24V-FL	Continuous LED low angle diffused ringlight, inner diameter 18 mm, 60°, red
RT-DLR2-60-050-2-G-24V-FL	Continuous LED low angle diffused ringlight, inner diameter 18 mm, 60°, green
RT-DLR2-60-050-2-B-24V-FL	Continuous LED low angle diffused ringlight, inner diameter 18 mm, 60°, blue


LTLADC series  
Continuous LED low angle direct ringlights

RT-LLA-75-130-3-W-24V-FL	Continuous LED low angle direct ringlights, inner diameter 94 mm, 75°, white
RT-LLA-75-130-3-R-24V-FL	Continuous LED low angle direct ringlights, inner diameter 94 mm, 75°, red
RT-LLA-75-130-3-G-24V-FL	Continuous LED low angle direct ringlights, inner diameter 94 mm, 75°, green
RT-LLA-75-130-3-B-24V-FL	Continuous LED low angle direct ringlights, inner diameter 94 mm, 75°, blue

LTRNDC series  
Continuous LED direct ringlights

RT-LSW-15-050-2-W-24V-FL	Continuous LED direct ringlight, inner diameter 28 mm, 15°, white
RT-LSW-15-050-2-R-24V-FL	Continuous LED direct ringlight, inner diameter 28 mm, 15°, red

All product specifications and data are subject to change without notice to improve reliability, functionality, design or other. Photos and pictures are for illustration purposes only.

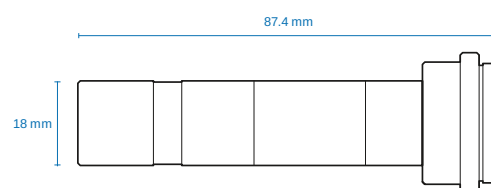

RT-LSW-15-050-2-G-24V-FL	Continuous LED direct ringlight, inner diameter 28 mm, 15°, green
RT-LSW-15-050-2-B-24V-FL	Continuous LED direct ringlight, inner diameter 28 mm, 15°, blue
RT-LSW-45-070-3-W-24V-FL	Continuous LED direct ringlight, inner diameter 35 mm, 45°, white
RT-LSW-45-070-3-R-24V-FL	Continuous LED direct ringlight, inner diameter 35 mm, 45°, red
RT-LSW-45-070-3-G-24V-FL	Continuous LED direct ringlight, inner diameter 35 mm, 45°, green
RT-LSW-45-070-3-B-24V-FL	Continuous LED direct ringlight, inner diameter 35 mm, 45°, blue

LTBFCシリーズ  
保留

RT-BHDS-25X36-1-W-24V-FL	Continuous flat side-emitting LED backlight, one side edge to edge type, 36X25 illumination area, white
RT-BHDS-25X36-1-R-24V-FL	Continuous flat side-emitting LED backlight, one side edge to edge type, 36X25 illumination area, red
RT-BHDS-25X36-1-G-24V-FL	Continuous flat side-emitting LED backlight, one side edge to edge type, 36X25 illumination area, green
RT-BHDS-25X36-1-B-24V-FL	Continuous flat side-emitting LED backlight, one side edge to edge type, 36X25 illumination area, blue

LTBRDCシリーズ  
連続LEDバーライト

RT-LBRX-00-040-6-W-24V-FL	Continuous LED bar light, 40X26.3 illumination area, white
RT-LBRX-00-040-6-R-24V-FL	Continuous LED bar light, 40X26.3 illumination area, red
RT-LBRX-00-040-6-G-24V-FL	Continuous LED bar light, 40X26.3 illumination area, green
RT-LBRX-00-040-6-B-24V-FL	Continuous LED bar light, 40X26.3 illumination area, blue

LTOXC series  
Continuous LED coaxial lights

RT-CAS2-00-025-X-W-24V-FL	Continuous LED coaxial light, 27x27 active area, white
RT-CAS2-00-025-X-R-24V-FL	Continuous LED coaxial light, 27x27 active area, red
RT-CAS2-00-025-X-G-24V-FL	Continuous LED coaxial light, 27x27 active area, green
RT-CAS2-00-025-X-B-24V-FL	Continuous LED coaxial light, 27x27 active area, blue